

Industrial Automation Panel Mount Series

LITEON

Single Output 350W Non-PFC Data Sheet

For the latest revision, please visit power.liteon.com

Description

This is an AC to DC switching mode power supply which can output 350 watts continuous with forced cooling by a smart FSC (fan speed control) circuitry. It complies with worldwide safety and EMC regulations (refer to details below). This PSU has high c/p (capability/price) value for various industrial applications.

Features

- * Selected AC input voltage by a slide switch.
- * Withstand 300Vac surge voltage for 5 seconds
- * Full Protections: Short-circuit/ Over-voltage/ Over-current/ Over temperature
- * Built-in smart FSC (fan speed control) and fan on/off is controlled by output loading
- * LED indicator for normal output voltage operating.
- * 1U low profile
- * IEC/EN 62368-1 design compliance
- * Up to 5000 meters operating altitude (note #4)
- * High efficiency and high reliability



Electrical Specification


Model Name	HA-1351-24NL		HA-1351-12NL
Output			
Rated power	350W		
Rated voltage	24V	12V	
Rated current	14.6A	29.0A	
Ripple & Noise(max.) (note #2)	150mV	150mV	
Line & load regulation	±1%		
Hold-up time(typ.)	16ms		
Timing: AC ON delay / rising (max.)	3 sec / 30ms		
Input			
Rated voltage range	100V~120Vac(L) / 200V~240Vac(H), by a slide switch		
Operated voltage range (note #5)	90V~132Vac(L) / 180V~264Vac(H), 300Vac for 5 sec		

Current range (max.)	6.8A/100Vac; 3.4A/200Vac	
Inrush current (typ.)	60A/230Vac (cold start)	
Frequency range	50-60Hz	
Leakage current (max.)	2.0mA at 240Vac	
Efficiency (typ.)	87.0%	83%
Protection Function		
Over voltage (max.)	140% of rated voltage, hiccup mode protection until fault is removed	
Over current (max.)	140% of rated current, hiccup mode protection until fault is removed	
Short circuit at O/P	No damage, hiccup mode protection until fault is removed	
Over temperature	No damage, auto recovery until temperature is back to normal	
Others		
MTBF (min.) (note#3)	700K hours @ rated load	
Environment		
Temperature (note#5)	(operating) -20~70℃ / (storage) -40~85℃	
Humidity	(operating) 10~90% RH non-condensing / (storage) 5~95% RH	
Altitude (max.)	5000 meters	
Mechanical		
Dimension	215(L)*115(W)*40mm(H)	
Vibration	10~500 Hz, 5G 20min./1cycle per axis for all axes (X, Y, Z)	
Weight (typ.)	860g	
Safety		
Standard	IEC/EN 60950-1, K60950-1, IEC/EN 62368-1, CNS14336-1	
Withstand voltage	Input-Output: 4242VDC / Input-FG: 2150VDC / Output-FG: 700VDC	
Isolation resistance(min.)	Input-Output: 100Mohm @ 500VDC, 25℃, 70%RH	
EMC		
EN55032 (CISPR32)	Conducted EMI: class A / Radiated EMI: class A	
FCC	Conducted EMI: class A / Radiated EMI: class A	
EN61000-3-2	Harmonic distortion: Not applicable	
EN61000-4-2	ESD: ±8KV contact discharge / ±15KV contact discharge	
EN61000-4-3	Radiated RF immunity: 3V/m	
EN61000-4-4	EFT: ±1KV (AC port)	
EN61000-4-5	Surge: ±2KV DM / ±4KV CM	
EN61000-4-6	Conducted RF immunity: 3V/m	
EN61000-4-8	Magnetic field immunity: 1A/m	
EN61000-4-11	Voltage dip immunity	

Notes

#1: All specification defined at 230Vac/50Hz, rated power and 25°C ambient temperature if not mentioned

#5: De-rating curve of AC input voltage and ambient temperature:

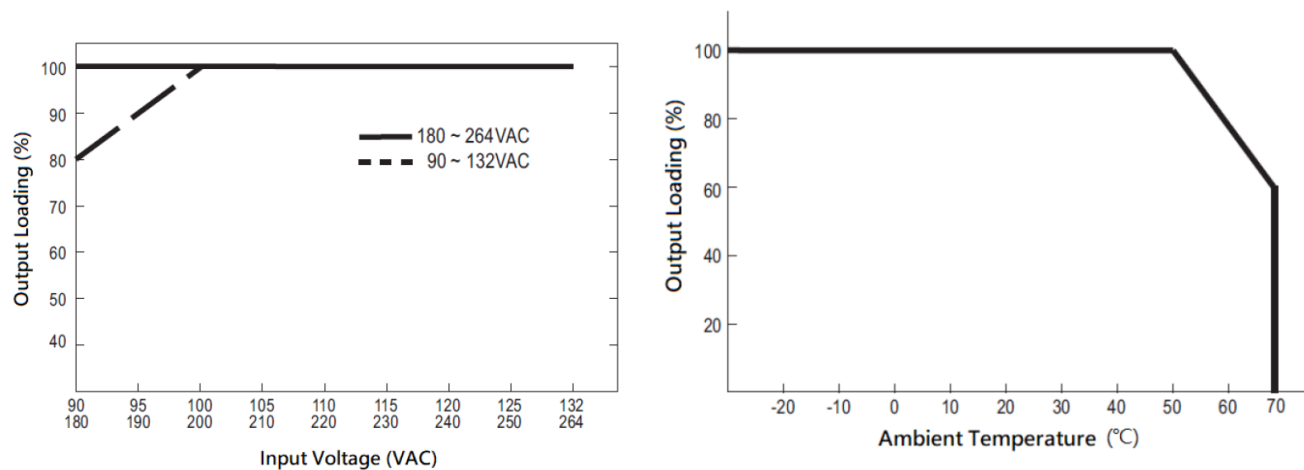

Technical drawing of the 1000 Series 1000W Power Supply, showing front, top, and side views with dimensions and labels.

Front View:

- Overall Width: 212 ± 0.5
- Overall Height: 115 ± 0.5
- Label Area: "MAIN LABEL" with a grid of ventilation slots.
- Input/Output Terminals: Four terminals labeled $+5V$, $+5V$, $+5V$, and $+5V$.
- Dimensions: 23.67 ± 0.50 (height of terminal block), 8.35 (REF) (width of terminal block), 3.5 (REF) (width of terminal block).
- Detail A: A circular feature on the left side.
- Dimensions: 41 (REF) (width of detail A), 35.8 (REF) (width of detail A).

Top View:

- Overall Width: 150 ± 0.5
- Overall Height: 29.5 ± 0.5
- Dimensions: 22.5 ± 0.5 (height of terminal block), 12.5 ± 0.5 (height of terminal block).
- Label: "4-M4 FRAME SCREW" pointing to a screw location.

Side View:

- Overall Width: 179.5 ± 0.5
- Overall Height: 82.5 ± 0.5
- Dimensions: 32.5 ± 0.5 (height of terminal block), 29.5 ± 0.5 (height of terminal block).
- Label: "SYSTEM SCREW 4-M4" pointing to a screw location.

Air Flow: Indicated by arrows pointing from the front and top views towards the right.