

# Industrial Automation Panel Mount Series

**LITEON**

## Single Output 400W PFC Model Data Sheet

For the latest revision, please visit [power.liteon.com](http://power.liteon.com)

### Description

This is a high-power factor (PF), AC to DC switching mode power supply unit which can output 400 watts continuous with forced cooling by a smart FSC (fan speed control) circuitry. It complies with worldwide safety and EMC regulations (refer to details below). And also, it is suitable for various industrial applications.

### Features

- \* Full AC input voltage range design.
- \* High power factor and less fictitious power.
- \* Withstand 300Vac surge voltage for 5 seconds.
- \* Full Protections: Short-circuit/ Over-voltage/ Over-current/ Over temperature.
- \* LED indicator for normal output voltage operating.
- \* 1U low profile.
- \* IEC/EN 62368-1 design compliance.
- \* Up to 5000 meters operating altitude (note#4)
- \* High efficiency and high reliability.



### Electrical Specification


Model Name	PA-1401-1LA	PA-1401-1LB
Output		
Rated power	400W	
Rated voltage	24V	12V
Rated current	16.7A	33.4A
Ripple & Noise(max.) (note #2)	200mV/400mV(burst mode)	150mV/400mV(burst mode)
Line & load regulation	±3%	
Hold-up time(typ.)	16ms	
Timing: AC ON delay / rising (max.)	1.5 sec / 30ms	
Input		
Rated voltage range	100~240Vac	
Operated voltage range (note #5)	90~264Vac, 300Vac for 5 sec	
Current range (max.)	5A/100Vac; 2.5A/200Vac	
Power factor (typ.)	>0.99/115Vac; >0.95/230Vac	

Inrush current (typ.)	100A/230Vac (cold start)	
Frequency range	50-60Hz	
Leakage current (max.)	1.5mA at 240Vac	
Efficiency (typ.)	89.0%	88.0%
Protection Function		
Over voltage (max.)	140% of rated voltage, latch-off protection	
Over current (max.)	135% of rated current, latch-off protection	
Short circuit at O/P	No damage, latch-off protection.	
Over temperature	No damage, latch-off protection	
Others		
MTBF (min.) (note#3)	700K hours @ rated load	
Environment		
Temperature (note#5)	(operating) 0~70℃ / (storage) -40~85℃	
Humidity	(operating) 10~90% RH non-condensing / (storage) 5~95% RH	
Altitude (max.)	5000 meters	
Mechanical		
Dimension	215(L)*115(W)*40mm(H)	
Vibration	10~500 Hz, 5G 20min./1cycle per axis for all axes (X, Y, Z)	
Weight (typ.)	900g	
Safety		
Standard	IEC/EN 60950-1, K60950-1, IEC/EN 62368-1, CNS14336-1	
Withstand voltage	Input-Output: 4242VDC / Input-FG: 2150VDC / Output-FG: 700VDC	
Isolation resistance(min.)	Input-Output: 100Mohm @ 500VDC, 25℃, 70%RH	
EMC		
EN55032 (CISPR32)	Conducted EMI: class B / Radiated EMI: class A	
FCC	Conducted EMI: class B / Radiated EMI: class A	
EN61000-3-2	Harmonic distortion: class D	
EN61000-4-2	ESD: ±8KV contact discharge / ±15KV contact discharge	
EN61000-4-3	Radiated RF immunity: 10V/m	
EN61000-4-4	EFT: ±2KV (AC port)	
EN61000-4-5	Surge: ±1KV DM / ±2KV CM	
EN61000-4-6	Conducted RF immunity: 10V/m	
EN61000-4-8	Magnetic field immunity: 30A/m	
EN61000-4-11	Voltage dip immunity	

## Notes

#1: All specification defined at 230Vac/50Hz, rated power and 25°C ambient temperature if not mentioned specifically.

- #2: Ripple noise is measured by a 30cm length, twisted wires with 0.47uF MLCC & 47uF low ESR capacitor.
- #3: Calculated by Telcordia SR332 at 25°C ambient temperature.
- #4: When operating altitude is higher than 2000m, the environment temperature derating factor is 0.36°C/100m.
- #5: De-rating curve of AC input voltage and ambient temperature:

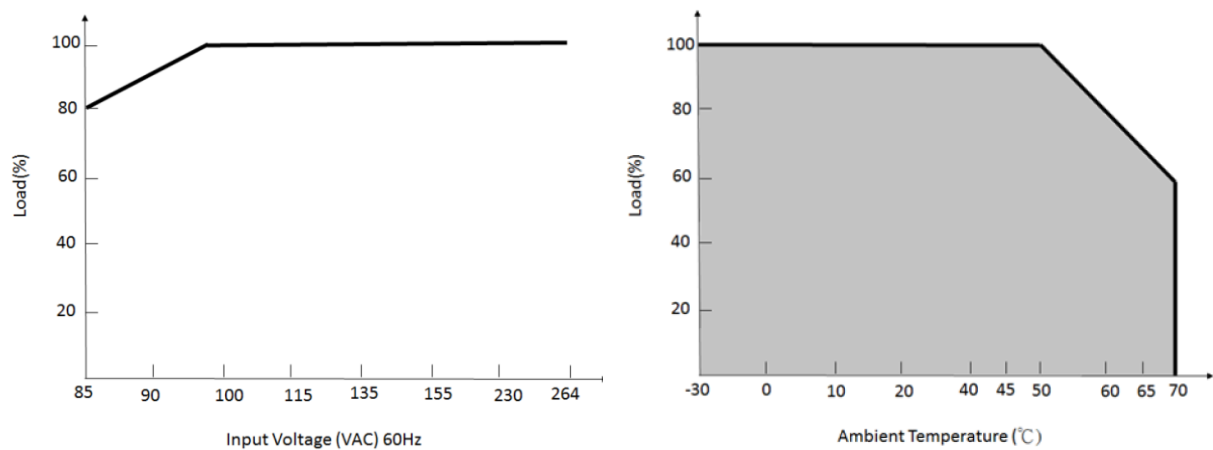

Mechanical Specification

